


# Set up BookDrive Mark 2 Lite

[www.atiz.com/support](http://www.atiz.com/support)

## Safety Precautions


- Place the machine on a level table to ensure proper working condition. Do not tilt the machine.
- Do not place the machine near heaters or volatile, flammable or combustible materials that may catch fire.
- The machine is not designed to be lifted. Do not lift or relocate the machine once it has been fully assembled. To relocate the machine, de-assemble it into parts first and then re-assemble them again at the desired location.

## Getting to know your BookDrive Mark II Lite

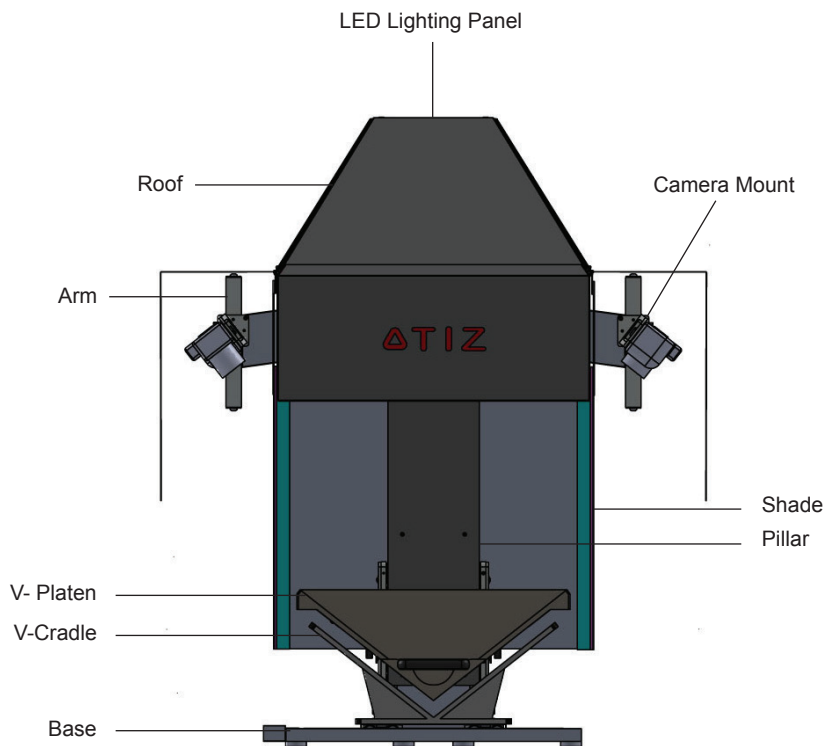


## How to assemble

1. There are 3 small boxes in Mark 2 Lite's box. Take 1,2 and 3 out as shown below.

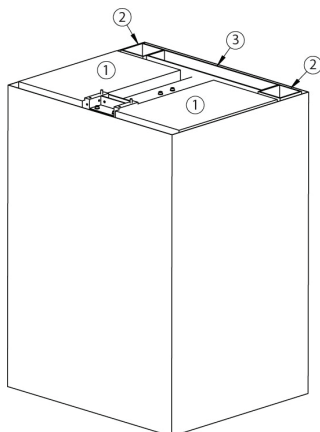


Tips : Take (1) then (2) and (3)


2. Take the left and the right arms out, then take the foam out from the arm.

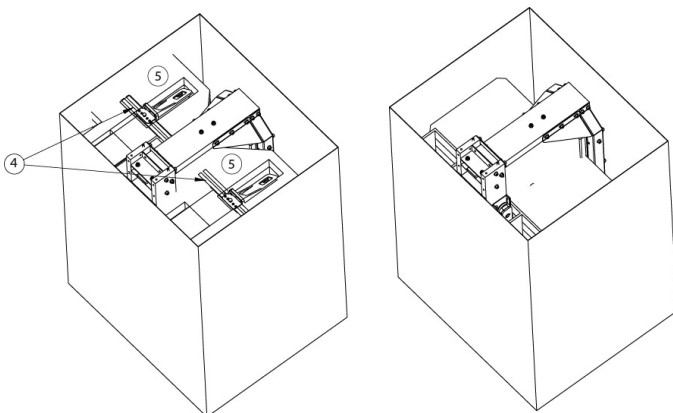


3. Lay down the box and take out the machine as shown below.

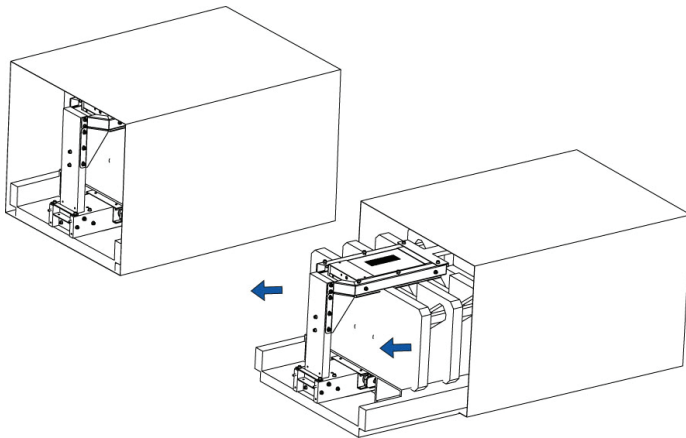

4. Now put the machine back on its feet.

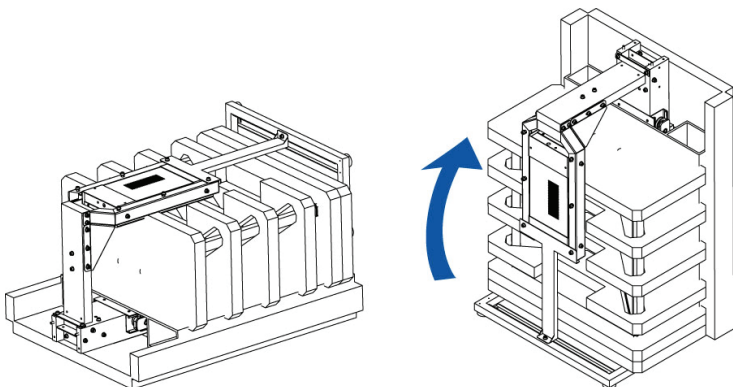


5. Remove the foam

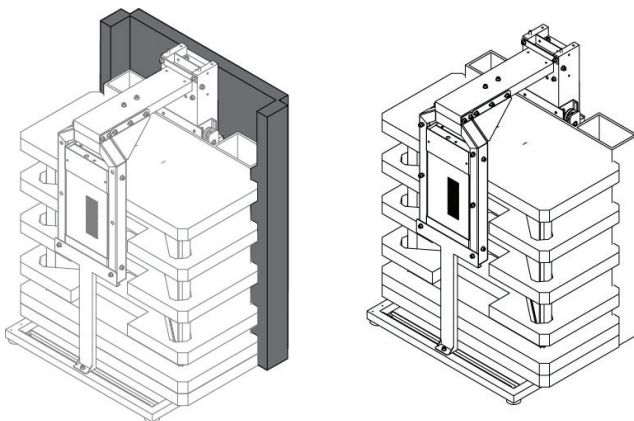


6. Remove the beam (removing bolts (6) by using the included Hex wrench). This piece is only used for support during transportation.


7. Remove bolts (7)

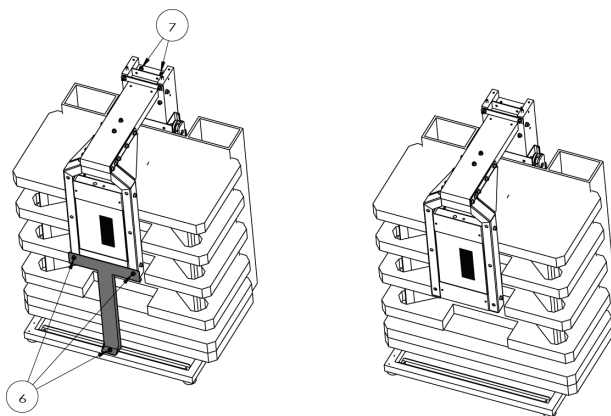


8. Loosen the bolts (8) and turn lever of LED (9) out then lift the LED up.
9. Tighten the bolts.
10. Screw the bolts (10) and (11).

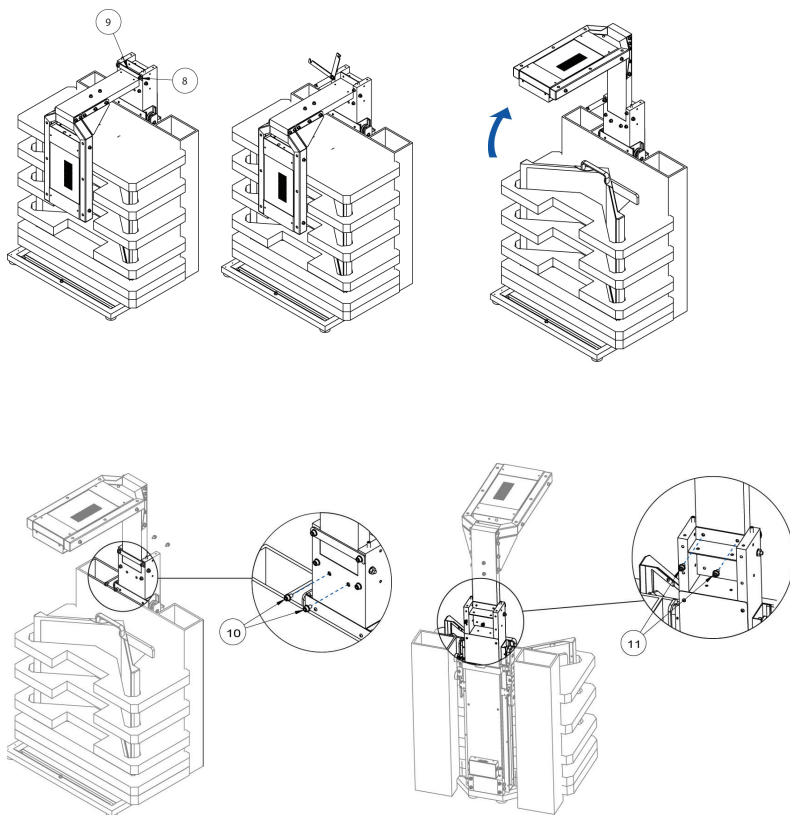

11. Take V- platen and cradle out.




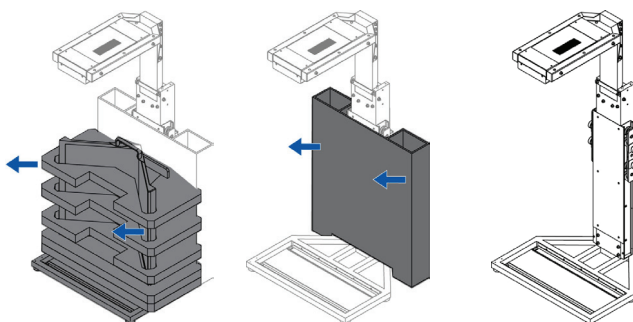


12. Take the arm from Box 1. Connect the left and the right arm to the pillar and screw the bolts.

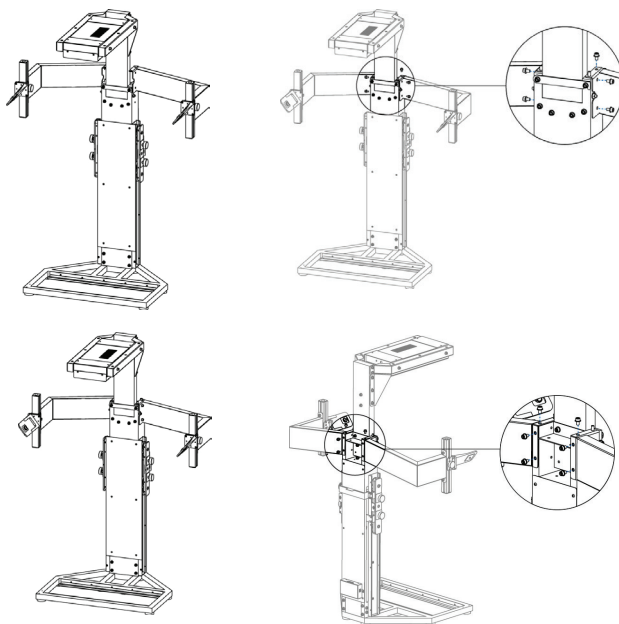





13. Install the roof and screw the bolts.

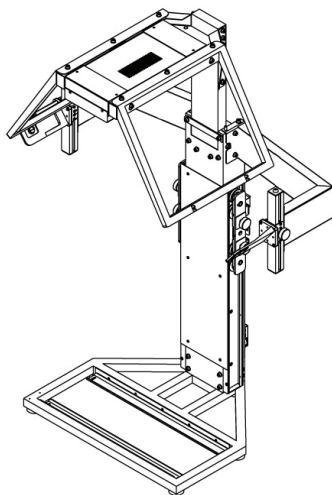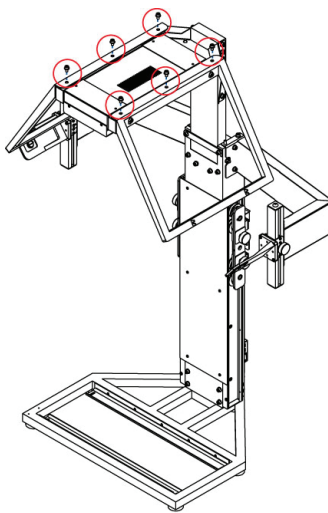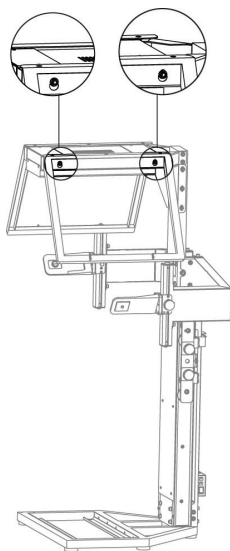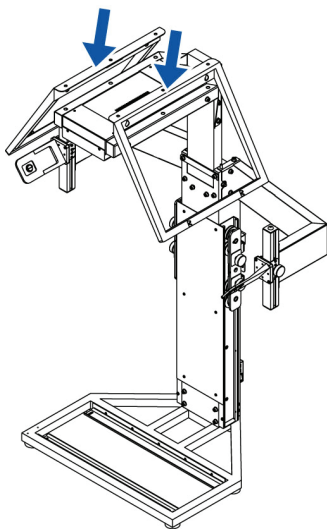


14. Put the cradle as shown.

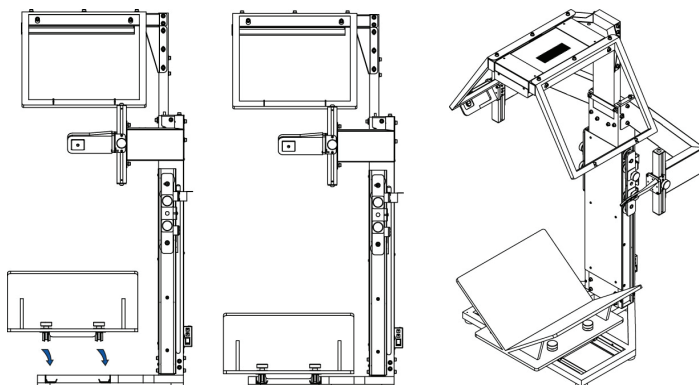


15. Put the v-platen on the cradle and lock the v-platen with knobs on each side.

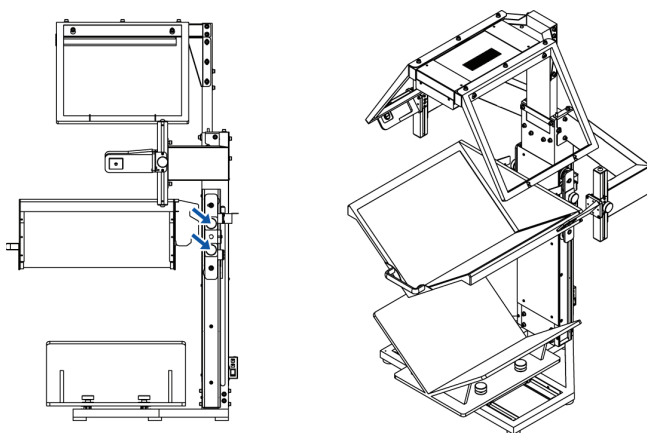


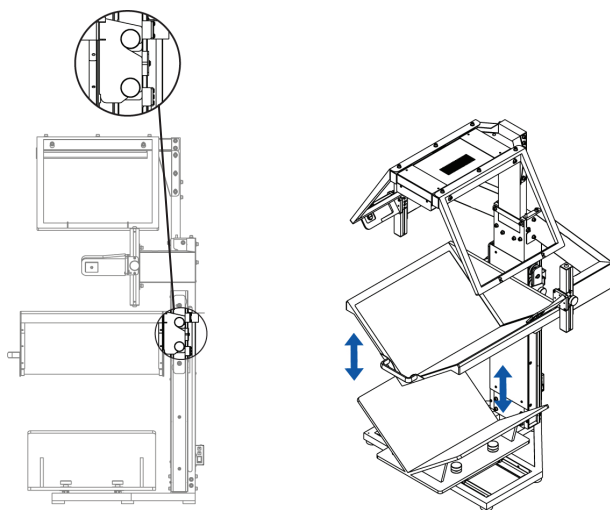


16. Put the plate to the pillar and lock it with bolts.

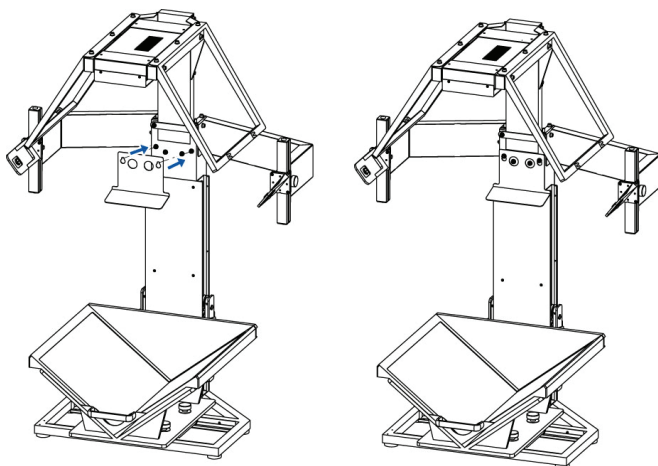


17. Install the switching holder.

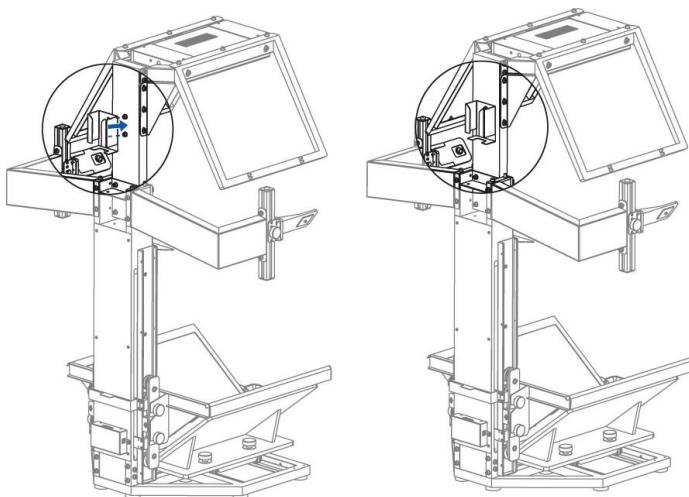


18. Lock the standby switch box with bolts.

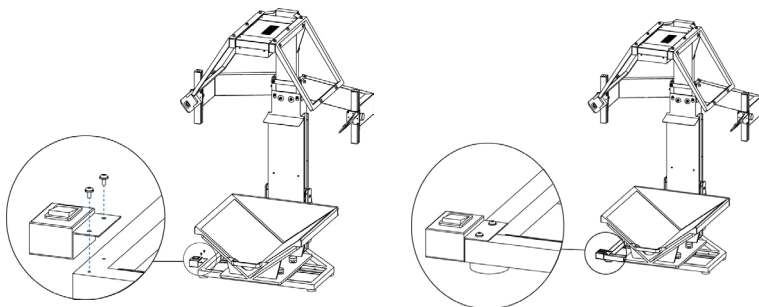


19. Install the switching power supply.

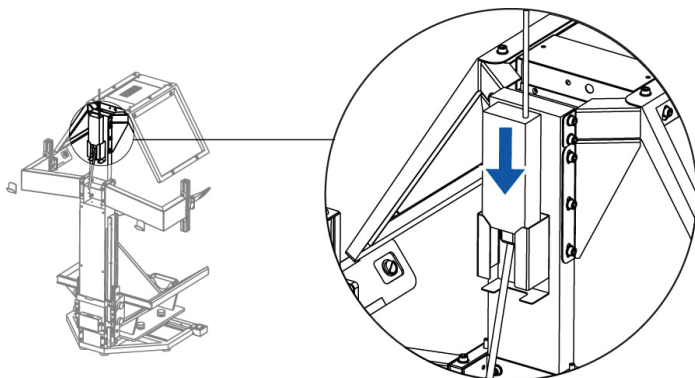


20. Collect the cable as shown below.

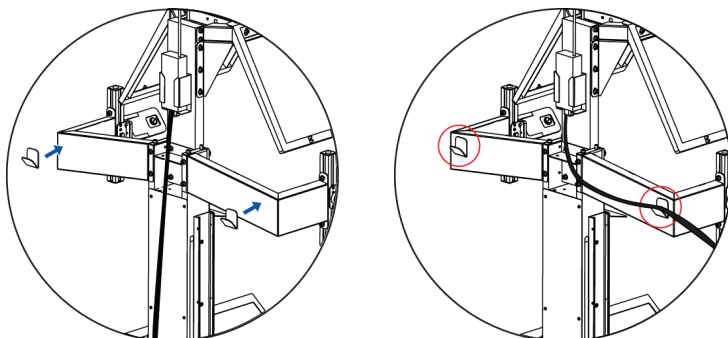


21. Connect standby switch and switching power supply to LED box.

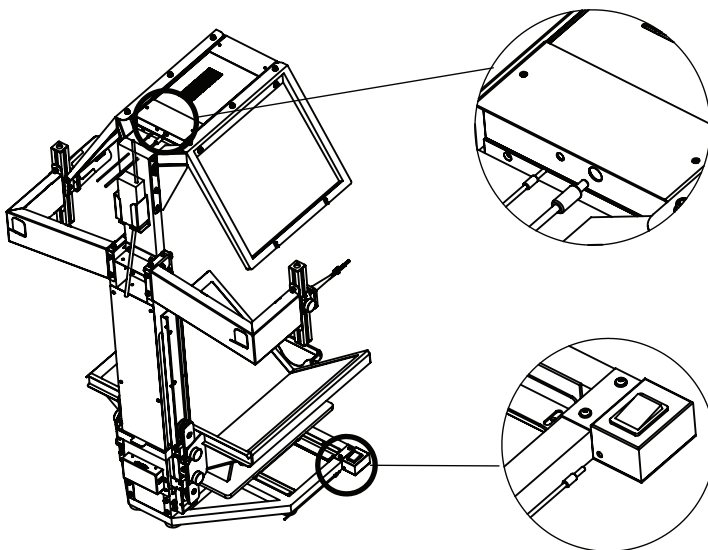


22. Attach the top shade as shown.

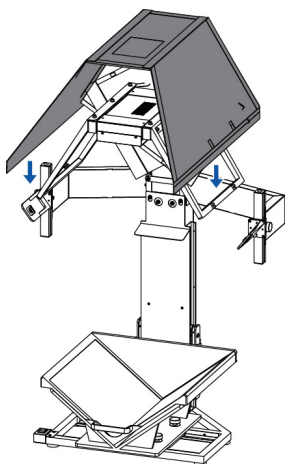


23. Collect the cloth of shade into the inside.

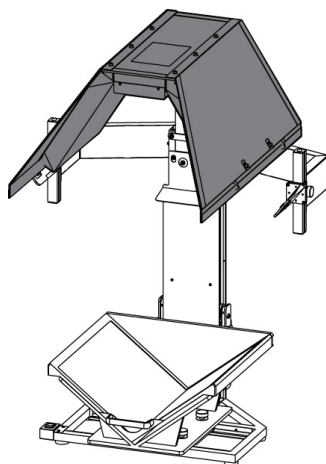


24. Attach the back shade as shown.

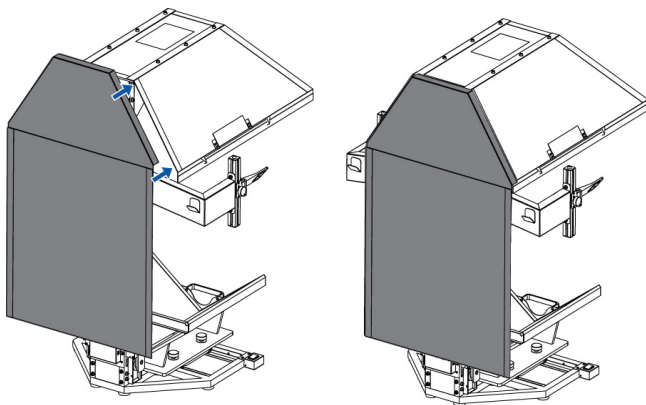


25. Attach the left shade to the left side and the right shade to the right side.

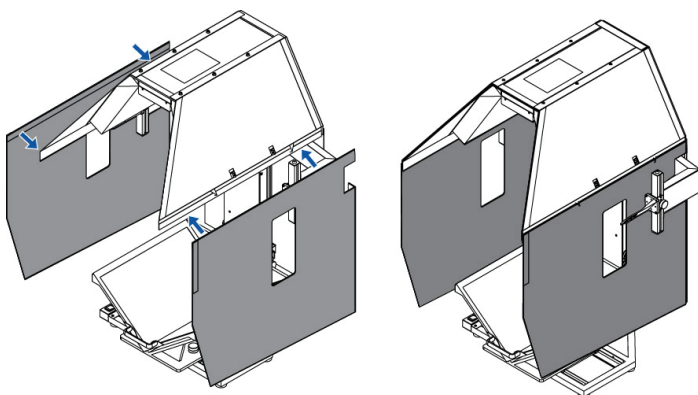

26. Attach the front shade to the front.

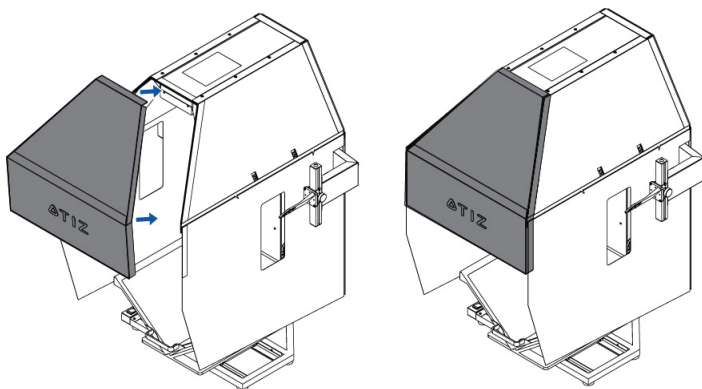


27. Attach the inner shades to the front shade.

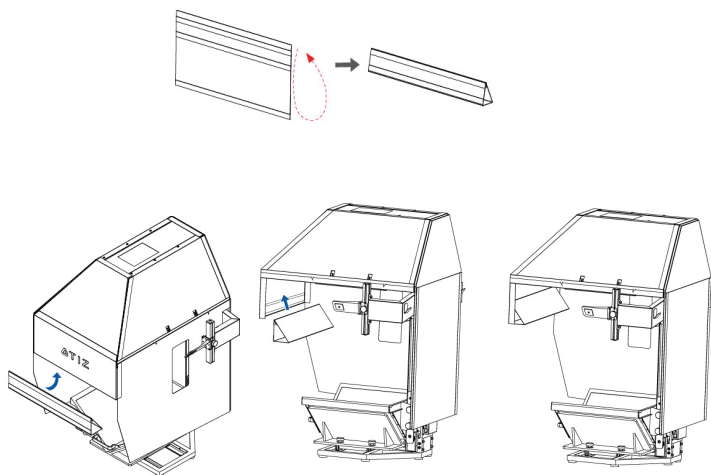




28. Attach the camera shades to the left and right of roof.

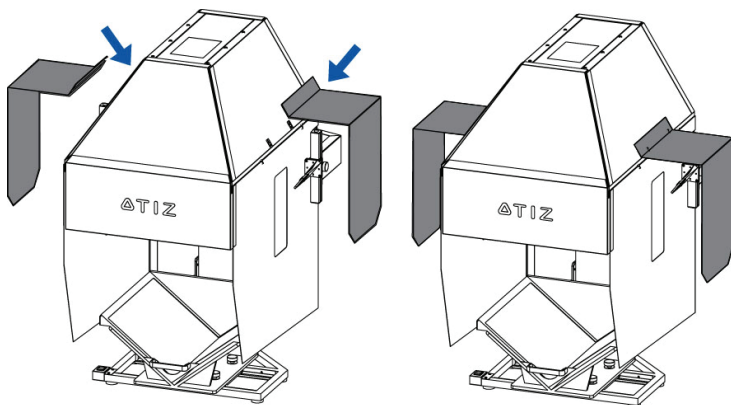


## How to make image straight

When the camera is not perfectly aligned resulting in a slightly rotated image, you can do micro adjustment at the plate where the camera is mounted.


Your image should come out straight and look like this.

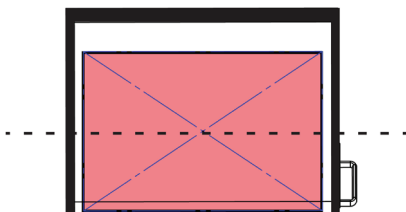


If your image looks like A, then loosen the screws **1** slightly and then adjust screws **2** to compensate until the image is properly aligned. Once the camera is properly aligned then proceed to tighten screws **1**.

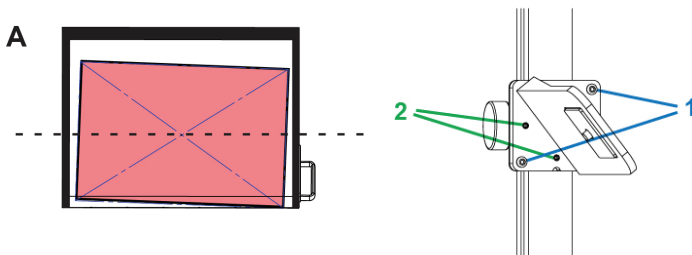


If your image looks like B, loosen screws **1** and then adjust screws **3** to compensate until image is aligned properly. Once it is aligned then tighten screws **3**.

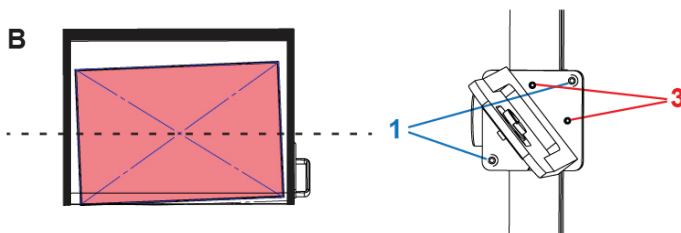

## How to install camera

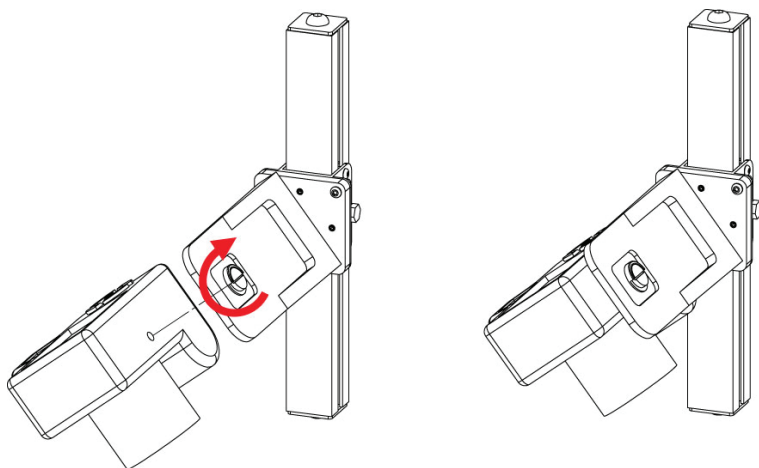


## Auto Capture Switch

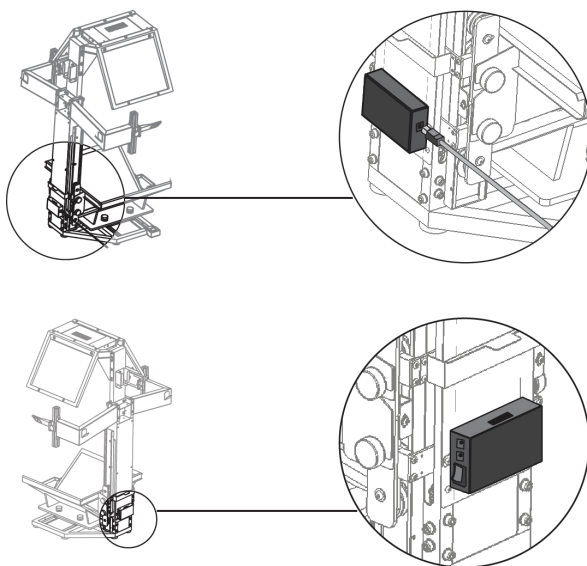

## How to set up the platen parallel with the cradle

1. Loosen the bolts at the position A.
2. Adjust by turning the position B.
3. When the position is properly then lock the bolts at the position A.

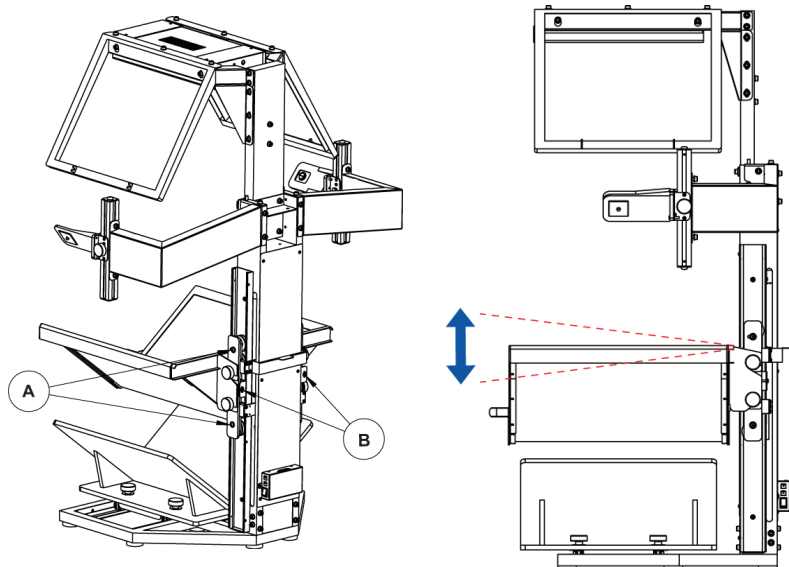

[www.atiz.com/support](http://www.atiz.com/support)

@Copyright 2006-2017 Atiz Innovation Co.,Ltd. All rights reserved.