

How to set up the software

Every BookDrive comes with 2 applications.

1. **BookDrive Capture** - for controlling the cameras to capture images
2. **BookDrive Editor Pro** - for image processing and making e-books

Requirements

Windows 7, Vista or XP

CPU - Pentium 3 1GHz or better

RAM - 512MB minimum (2GB is highly recommended)

USB 2.0 connection

Driver - Drivers for Canon camera must be installed


Monitor - 1024 x 768 resolution or higher

How to install the software

1. Make sure you've successfully installed Canon drivers and software that come with the cameras. Do not proceed to next step if you still can't do PC remote shooting using the Canon included software called **EOS Utility**.




(The actual screenshot of Canon software may differ from what's shown here)

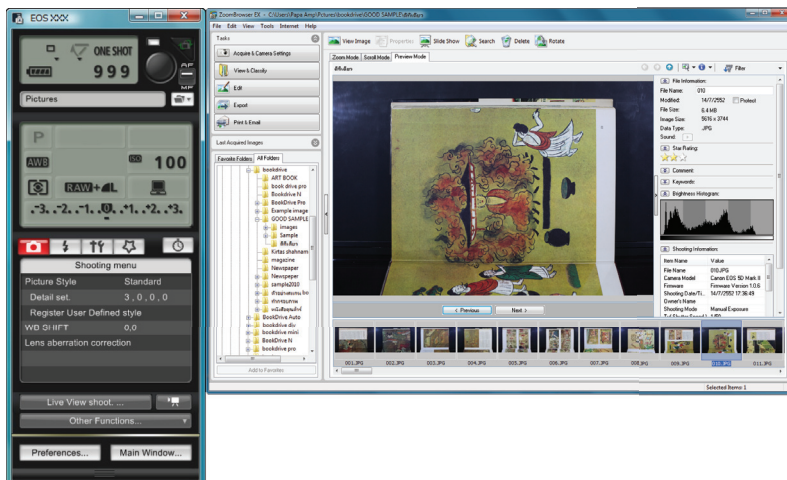


- 1.

2. Once you can do PC remote shooting through Canon software, you can now install BookDrive software.


If you want the latest version of the software, you can download from Atiz support page at www.atiz.com/support

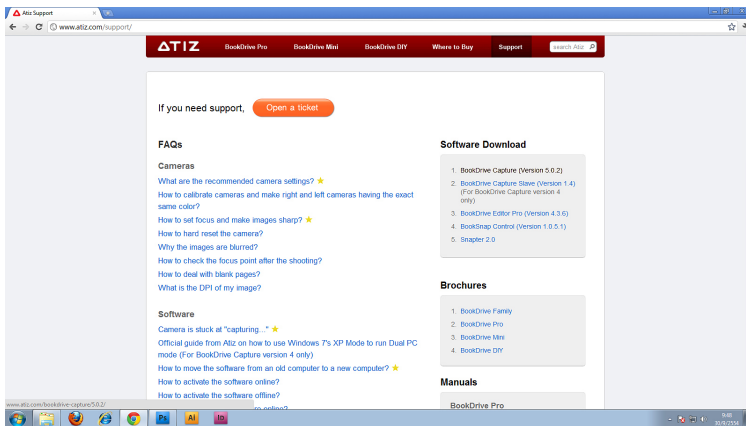

Double click the installation file to install.

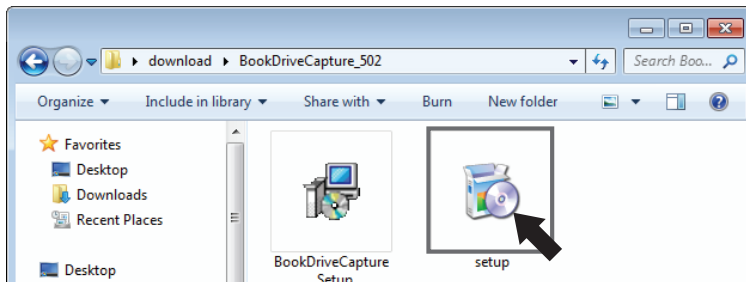


3. Once finished, you will see the program shortcuts on the desktop.

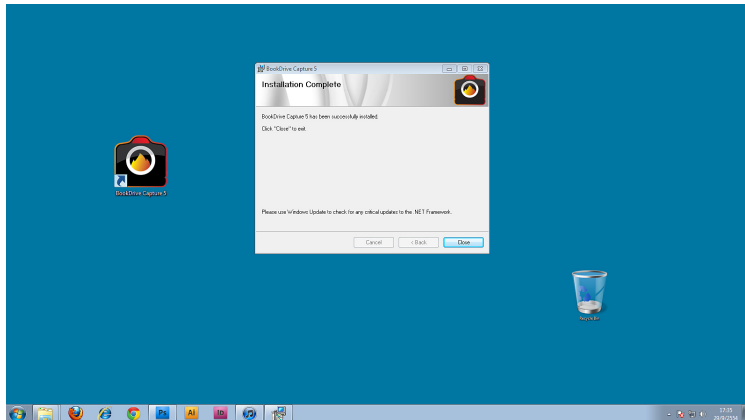

How to activate the software


1. You will see an activation window pop up when you open the program. The program allows 15 days of trial without activation.

If you're ready to activate and have Internet connection select **Activate online** and click **Next**.

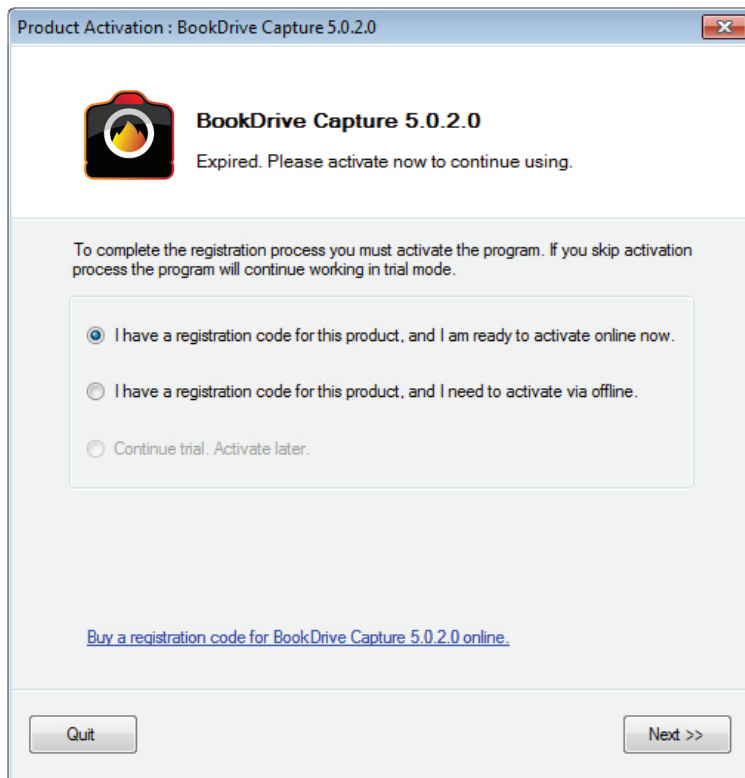

(If you don't have Internet connection on that computer, select **Activate offline**).

2. Fill out the registration code. Your registration code is in the warranty card.

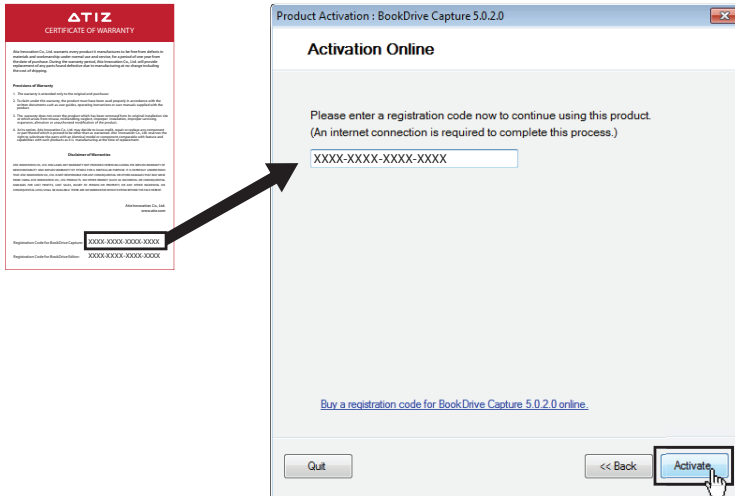

3. If the registration code is correct, the program will ask for your contact information. We need this information to contact you in the future when there are software updates available. Fill in your information and click **Activate**.

Product Activation : BookDrive Capture 5.0.2.0

Registration code is correct.

Please enter your information to complete the process.

I have information on this site.

Email Address: - xxxxxxx@xxx.com

First Name: - xxxxxxx

Last Name: - xxxxxxx

Address: - xxxxxxx

City: - xxxxxxx

State/Province: - xxxxxxx

Country: - xxxxxxx

Postal Code: - xxxxxxx

Phone Number: - xxxxxxx

Company: - xxxxxxx

Position: - xxxxxxx


Product Activation : BookDrive Capture 5.0.2.0

Activation successful

You have successfully activated the BookDrive Capture 5.0.2.0 on this computer.


It's now ready to use. You may exit this window.

- Once the activation is completed, you are ready to use the program.

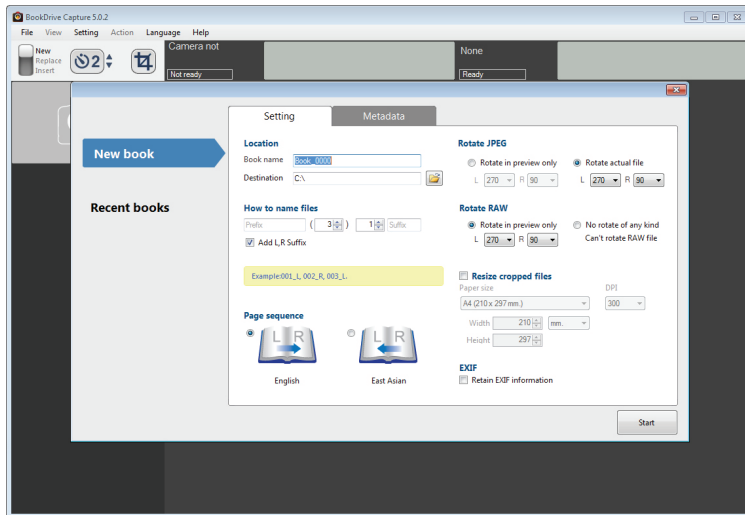

How to activate offline?

1. Select **Activate offline** and click **Next**.

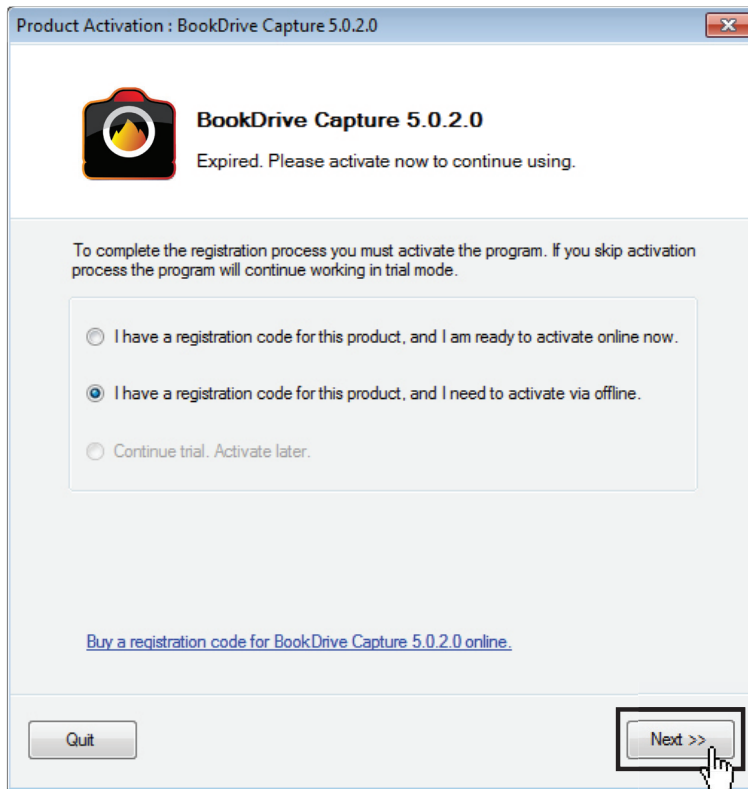

Step to activate offline.


1. Copy the file “atizsys.lic” onto a flash drive. This file can be found on C:\Program files\Atiz\BookDrive Capture or BookDrive Editor Pro\atizsys.lic



2. Copy from the flash drive onto another PC that's connected to the Internet.



3. Open a web browser. Go to <http://www.atiz.com/software/register>
Upload the file and submit. Atiz web will generate the activation code on the page. Please write it down on paper.

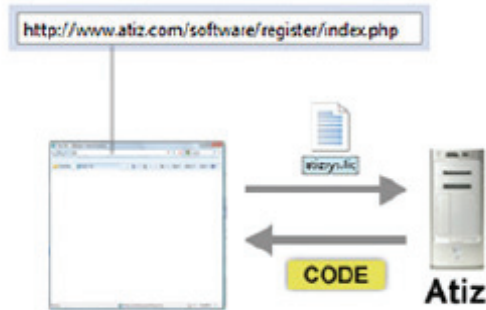

4. Use that code and fill in the activation code dialog box on the installed PC. Click "**Activate**". Done.




How to move the software to another computer?


The license only allows you to install the software on only 1 computer at a time.

But you can move the software from an old computer to a new computer.
Here are the steps.


1. First, deactivate the software on the old computer. Open the program that you want to deactivate, Click **Menu / Help / Deactivate**

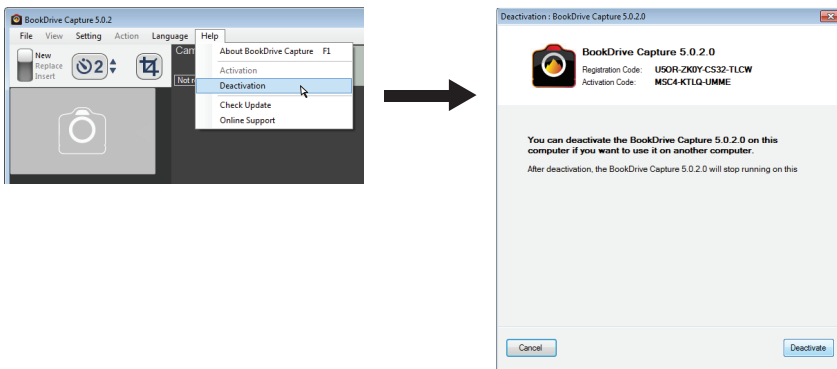

2. You will see the deactivation window. Click "Deactivate".

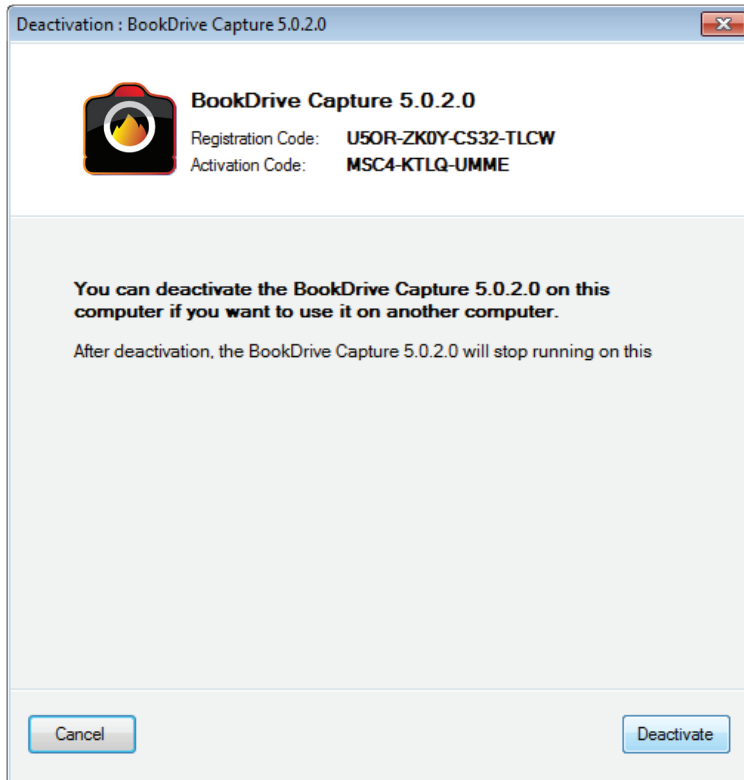

3. The deactivation is complete.

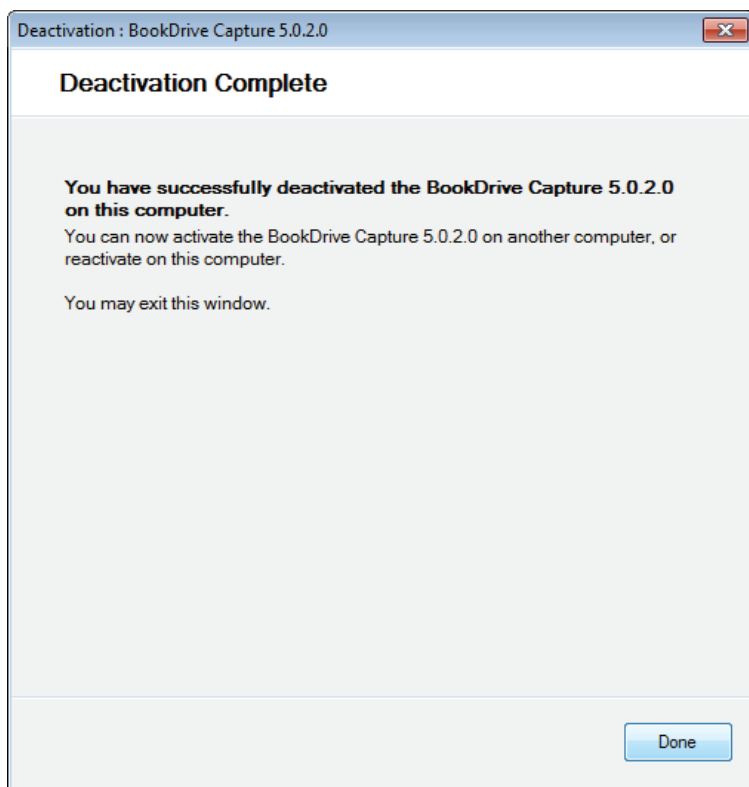

4. Install the program on the new computer. You have to go through the activation process again (as if you're activating the program for the first time) to obtain the new activation code for use on the new computer.

2. Software

www.atiz.com/support

www.atiz.com

©Copyright 2006-2011. Atiz Innovation Co.,Ltd. All rights reserved.