


1. Set up BookDrive Mini 2

www.atiz.com/support


Safety Precautions

- Place the machine on a level table to ensure proper working condition.
Do not tilt the machine.
- Do not place the machine near heaters or volatile, flammable or combustible materials that may catch fire.


Box Contents




BookDrive Mini platform




LED lighting set




Switching power supply




Camera mounting



Knob x 5

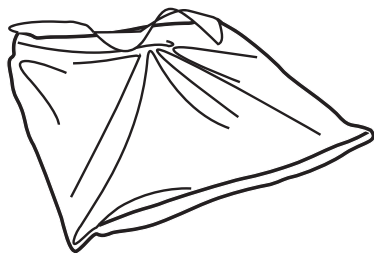

Shade



User Manual



USB Hub



USB 2.0 Cable x 2



Software

Dimension and Wieght


Dimension:

Depth: 24 inches

Width: 34 inches

Height: 30 inches


Weight: 23 kg (50.7 lbs)

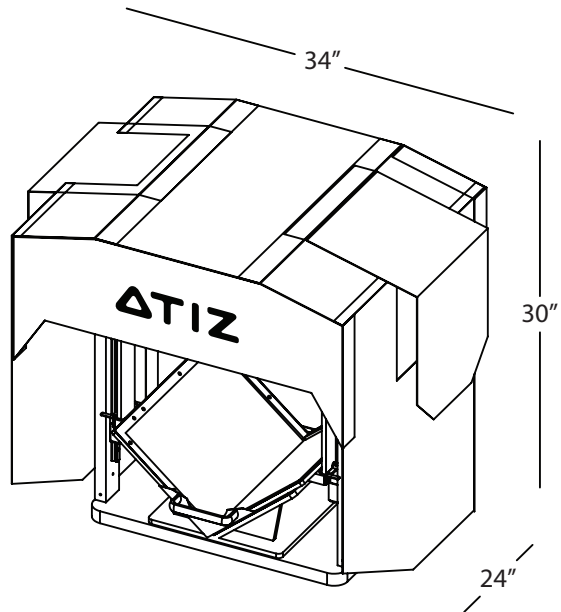


Page Size Support

BookDrive Mini supports pages that are within 10 x 15 inches.


It supports A4 and legal sizes among others.

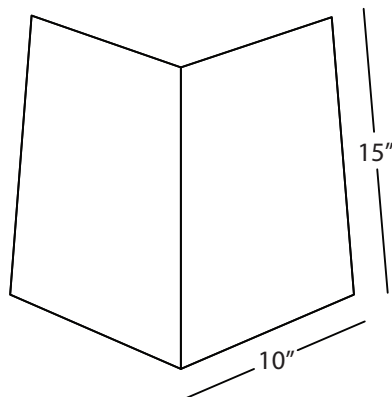


Part Identification

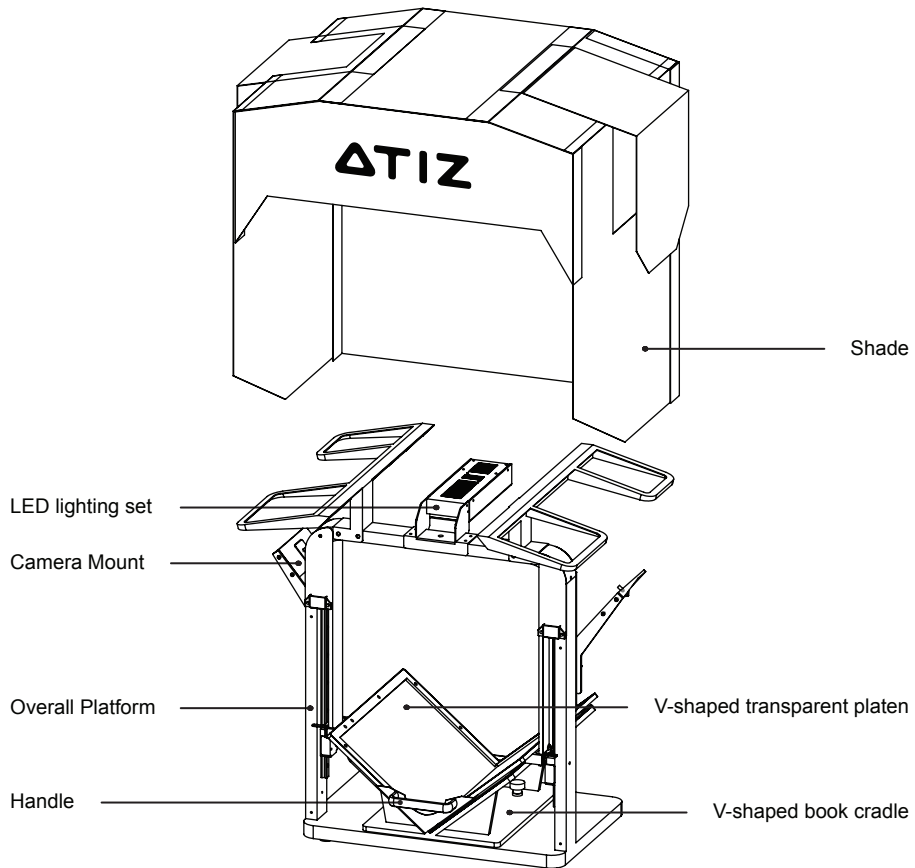


How to assemble




1. Pull the cardboard holder straight up.




2. Place the cardboard holder on the floor.

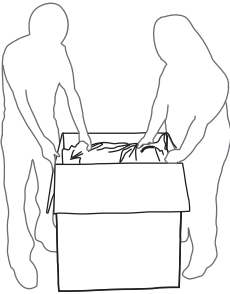


3. Use 2 people to lift BookDrive Mini out of the box. Hold the metal structure when lifting.

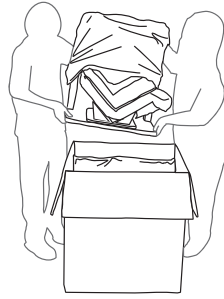


4. Lift BookDrive Mini out of the box as shown.

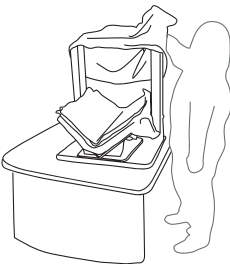


5. Place BookDrive Mini on a table that is level and strong enough to withstand at least 30 kg (70 lbs).

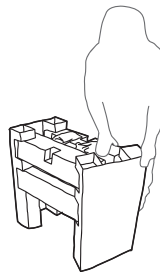


6. Slowly disassemble the cardboard holder.

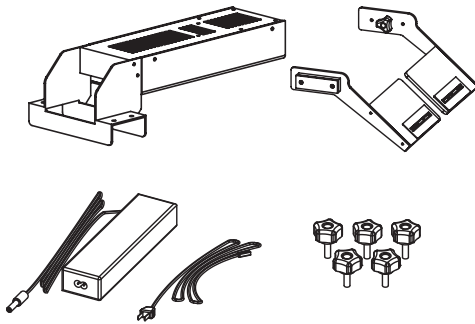


7. The cardboard contains the camera mounts, LED light set, knobs, magnetic book holders and hexagon screwdriver.

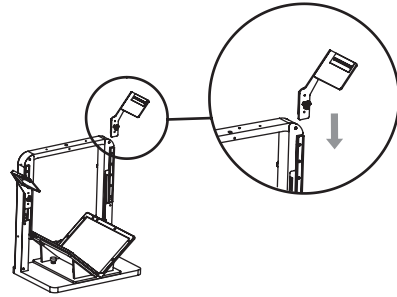


8. Install the camera mount by inserting it into the slot.




9. The camera mount once installed should look like this.

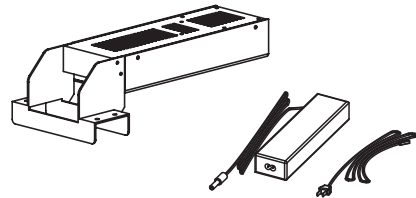


10. This is the LED lighting set.

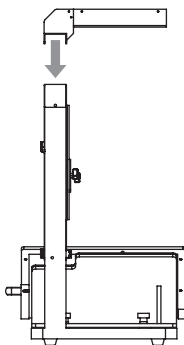


11. Hold the lighting set with both hands, place it on top on the platform.

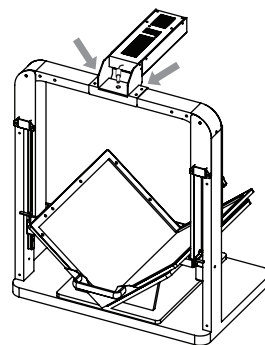


12. Screw 4 bolts.
Plug the DC connector.

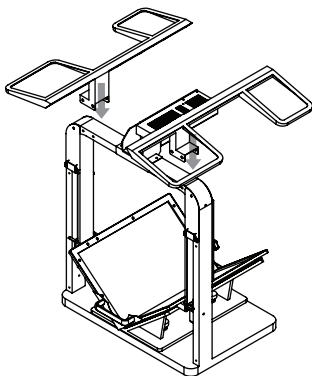


13. Install roof

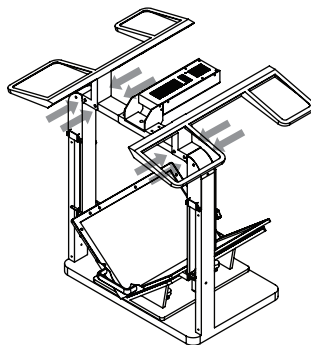


14. Screw 4 bolts both left and right roof.

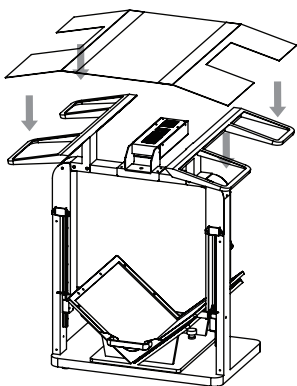


15. Put the top shade.

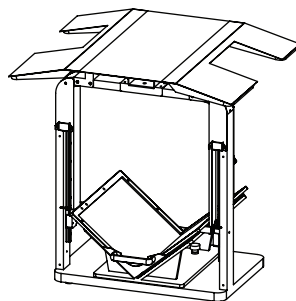


16. Install left and right shade.

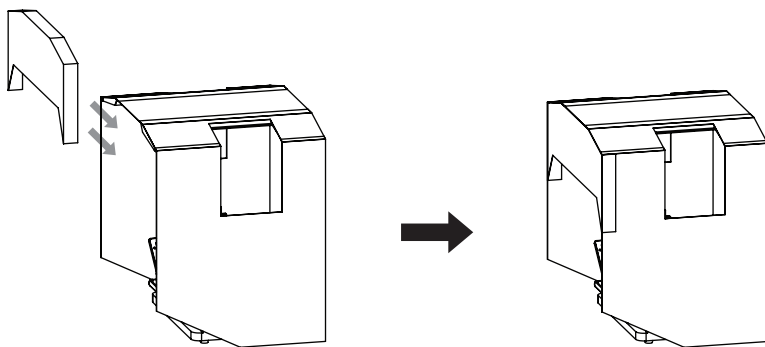


17. Install front shade.

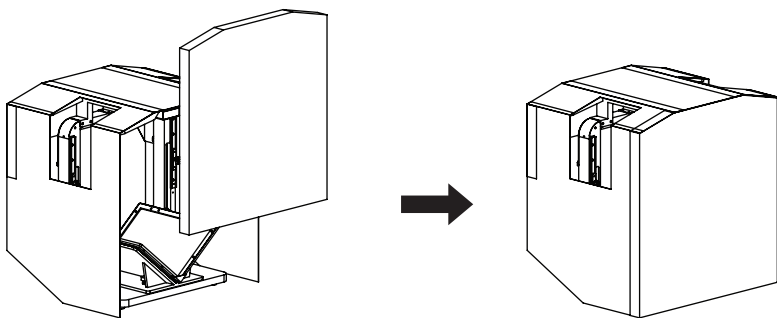

18. Install rear shade.

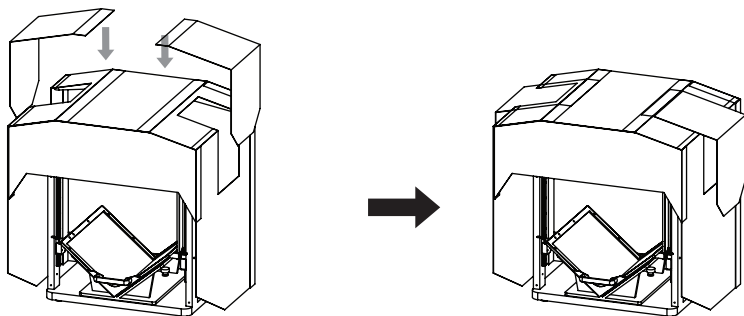

19. Install cam shade both left and right.

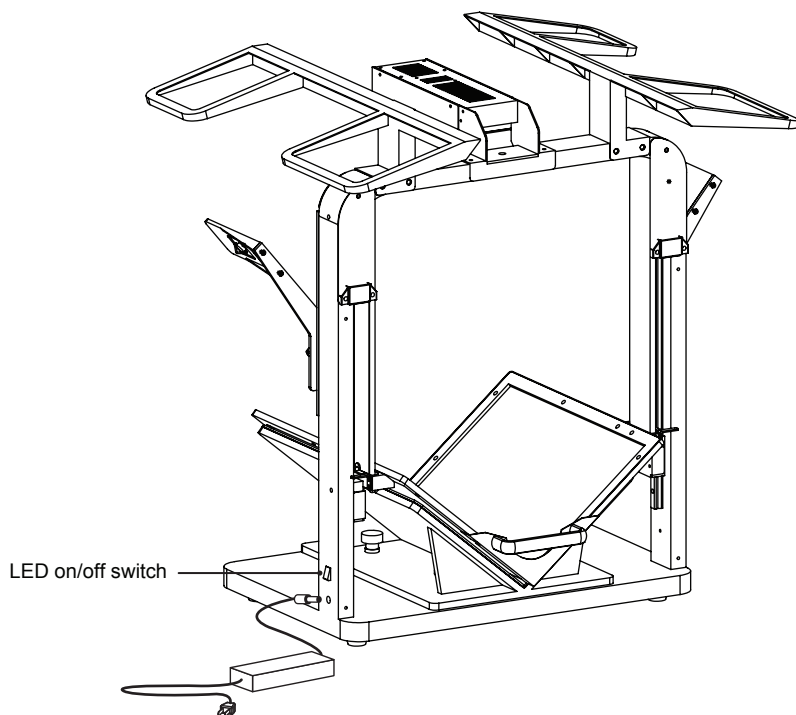

20. Plug switching power supply.

www.atiz.com